

Stelrad S1 and S2 Style Radiator



The Style Radiator offers a modern, sleek design and excellent value while still providing exceptional BTU output. The Style Radiator range is now available in four popular heights and a wide selection of lengths in both the single or double panel. Finished in a powder coated white the radiator comes with hardware pack and wall brackets. Valves sold separately. Ten year warranty on all horizontal Style Radiators.

See page 15 for the new Style Vertical Radiator, now available in a 12" width.

Please allow seven to ten days for delivery. All Style Radiator orders are subject to a 25% restocking fee.

North American Distribution: Barrie, Ontario, Canada Tel: 1-888-719-9913 Fax: 1-888-903-3340

EXPRESS RADIANT LTD. PURSUE A POLICY OF CONTINUING IMPROVEMENT IN DESIGN AND PERFORMANCE OF THE PRODUCTS WE SELL. THE RIGHT IS THEREFORE RESERVED TO VARY SPECIFICATIONS AND PRICING WITHOUT NOTICE.
Stelrad® and Herz® Canadian Distributor | ©2014 Express Radiant Ltd.

10 Stelrad S1 and S2 Style Radiator Sizes and Technical Data

PART # (Inches)	HEIGHT (mm)	LENGTH (mm)	OUTPUT bth/hr 110 °F AWT	OUTPUT bth/hr 140 °F AWT	OUTPUT bth/hr 160 °F AWT	OUTPUT bth/hr 180 °F AWT	WEIGHT (Lbs)	STOCK STATUS
S1 08 20	200	500	263	526	732	939	12	stock
S1 08 40	200	1000	526	1051	1464	1877	20	stock
S1 08 60	200	1500	801	1602	2232	2862	28	stock
S1 08 80	200	2000	1052	2104	2931	3758	36	stock
S1 12 20	300	500	270	554	768	997	13	stock
S1 12 40	300	1000	540	1107	1535	1992	27	stock
S1 12 60	300	1500	862	1766	2450	3180	40	stock
S1 12 80	300	2000	1080	2214	3071	3986	52	stock
S1 18 20	450	500	399	818	1135	1473	19	stock
S1 18 24	450	600	479	982	1362	1768	24	stock
S1 18 32	450	800	639	1309	1816	2357	32	stock
S1 18 36	450	900	719	1473	2043	2652	37	stock
S1 18 44	450	1100	878	1800	2496	3240	45	stock
S1 18 48	450	1200	958	1963	2723	3534	49	stock
S1 18 64	450	1600	1277	2618	3631	4713	66	stock
S1 18 72	450	1800	1437	2945	4085	5302	73	stock
S1 24 20	600	500	517	1061	1471	1909	28	stock
S1 24 24	600	600	621	1273	1765	2291	33	stock
S1 24 32	600	800	828	1697	2354	3055	44	stock
S1 24 36	600	900	931	1908	2647	3436	50	stock
S1 24 44	600	1100	1138	2333	3236	4200	61	stock
S1 24 48	600	1200	1242	2546	3531	4583	66	stock
S1 24 64	600	1600	1656	3394	4708	6111	88	stock
S1 24 72	600	1800	1863	3818	5296	6874	100	stock
S2 08 20	200	500	458	948	1304	1689	17	stock
S2 08 40	200	1000	911	1896	2609	3380	31	stock
S2 08 60	200	1500	1373	2844	3913	5069	44	stock
S2 08 80	200	2000	1832	3792	5216	6758	56	stock
S2 12 20	300	500	518	1063	1474	1913	27	stock
S2 12 40	300	1000	1037	2126	2949	3828	43	stock
S2 12 60	300	1500	1556	3188	4422	5740	64	stock
S2 12 80	300	2000	2074	4251	5896	7653	85	stock
S2 18 20	450	500	724	1484	2058	2671	32	stock
S2 18 24	450	600	869	1781	2470	3206	39	stock
S2 18 32	450	800	1158	2374	3292	4273	52	stock
S2 18 36	450	900	1303	2671	3704	4808	59	stock
S2 18 44	450	1100	1593	3265	4528	5877	73	stock
S2 18 48	450	1200	1737	3561	4939	6411	79	stock
S2 18 64	450	1600	2317	4749	6586	8549	106	stock
S2 18 72	450	1800	2606	5342	7409	9617	119	stock
S2 24 20	600	500	915	1875	2600	3375	45	stock
S2 24 24	600	600	1098	2250	3120	4050	53	stock
S2 24 32	600	800	1463	2999	4160	5400	71	stock
S2 24 36	600	900	1646	3374	4680	6075	80	stock
S2 24 44	600	1100	2012	4124	5720	7425	98	stock
S2 24 48	600	1200	2195	4499	6240	8100	106	stock
S2 24 64	600	1600	2927	5999	8320	10799	142	stock
S2 24 72	600	1800	3292	6749	9360	12149	161	stock

Stelrad Style S1 and S2 Rough-In and Technical Data

To determine the output of the radiator for average water temperatures other than 180 °F and air temperature of 70 °F apply the correction factor below and multiply by the quoted output of the radiator.

		Average Water Temperature (°F)									
		110	120	130	140	150	160	170	180	190	200
		FACTOR									
Room Air Temperature (°F)	80	0.207	0.293	0.384	0.477	0.590	0.690	0.800	0.910	1.026	1.141
	75	0.25	0.338	0.430	0.533	0.640	0.745	0.855	0.968	1.083	1.198
	72	0.271	0.361	0.453	0.561	0.665	0.772	0.882	0.997	1.112	1.226
	70	0.293	0.384	0.477	0.590	0.690	0.800	0.910	1.026	1.141	1.255
	65	0.338	0.430	0.533	0.640	0.745	0.855	0.968	1.083	1.198	1.316

STYLE COMPACT LUG POSITIONS - OPTION 1

L	S1		S2		D	
	A	B	C	D		
	(mm)	(Inches)	(mm)	(Inches)		
400	117	4.625	-	133	5.25	-
500 - 1100	150	6	-	133	5.25	-
1200 - 1600	283	11	-	267	10.5	-
1800 - 3000	283	11	(L/2)	267	10.5	(L/2)


Option 1 - existing stock.

STYLE COMPACT LUG POSITIONS - OPTION 2

L	S1		S2		D		
	A	B	C	D			
	(mm)	(Inches)	(mm)	(Inches)	(mm)	(Inches)	
400	117	4.625	-	-	133	5.25	-
500 - 1100	150	6	-	-	133	5.25	-
1200 - 1600	150	6	L/2 + 17	L/2 + .625	133	5.25	-
1800 - 3000	150	6	L/2 + 17	L/2 + .625	133	5.25	(L/2)

Option 2 - incoming stock.

Please call for clarification or rough-in for both options.

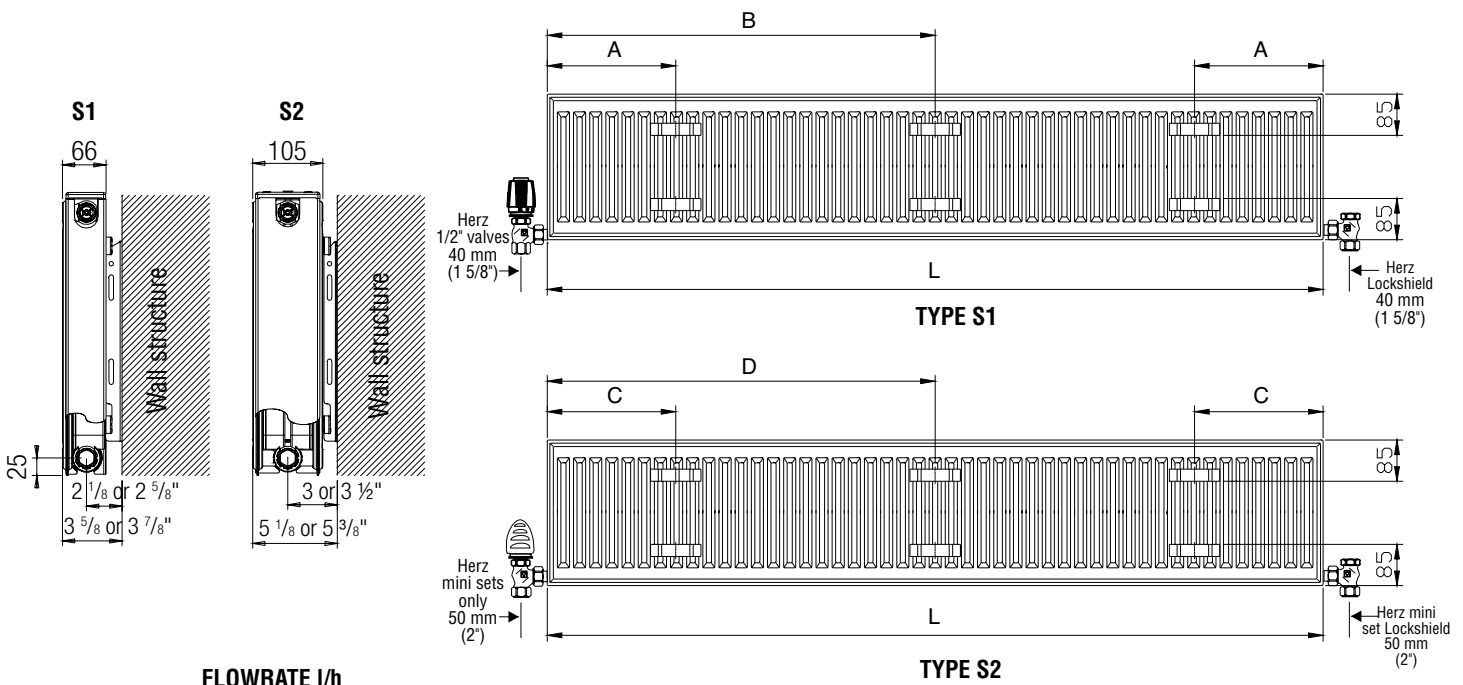

FLOWRATE l/h

North American Distribution: Barrie, Ontario, Canada Tel: 1-888-719-9913 Fax: 1-888-903-3340